

LANCE WITH FILTER SIEVE

- ✓ **High-quality craftsmanship**
- ✓ **Polyurethane grip**
- ✓ **Optimal for recycled water**

The high quality stainless steel Mosmatic lance with integrated sieve. Ideal for an application not using a high pressure gun, connecting the hose directly to the lance.



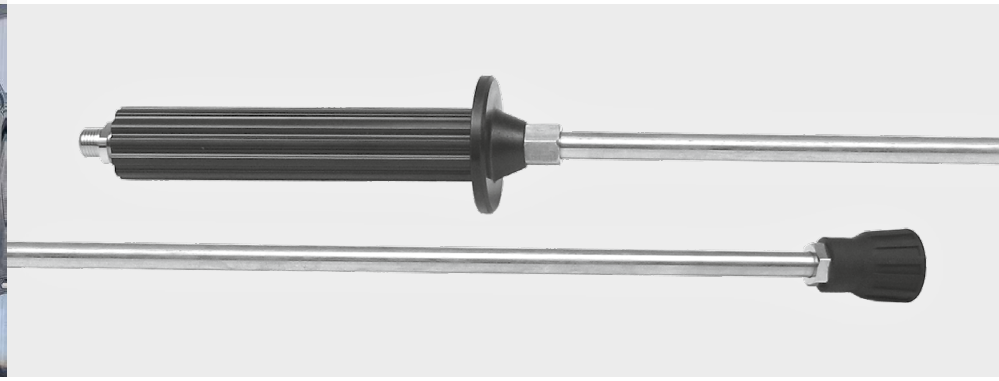


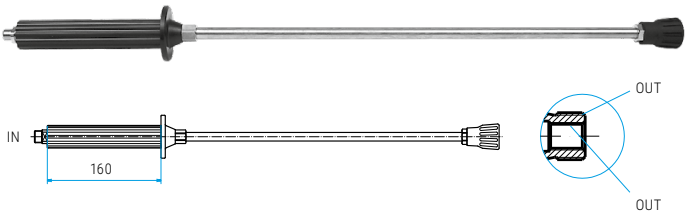

Mosmatic LAS-C (Classic-Lance with filter sieve, hard plastic handle)

Part No.	L	IN	OUT	Weight
28.003	500	G1/4" M	G3/8" M + 1/8" NPTF	0.5 kg
28.004	650	G1/4" M	G3/8" M + 1/8" NPTF	0.5 kg
28.005	750	G1/4" M	G3/8" M + 1/8" NPTF	0.6 kg
28.006	850	G1/4" M	G3/8" M + 1/8" NPTF	0.6 kg
28.007	950	G1/4" M	G3/8" M + 1/8" NPTF	0.7 kg
28.008	1050	G1/4" M	G3/8" M + 1/8" NPTF	0.7 kg
28.053	500	G3/8" M	G3/8" M + 1/8" NPTF	0.5 kg
28.054	650	G3/8" M	G3/8" M + 1/8" NPTF	0.6 kg
28.055	750	G3/8" M	G3/8" M + 1/8" NPTF	0.6 kg
28.056	850	G3/8" M	G3/8" M + 1/8" NPTF	0.6 kg
28.057	950	G3/8" M	G3/8" M + 1/8" NPTF	0.7 kg
28.058	1050	G3/8" M	G3/8" M + 1/8" NPTF	0.7 kg
28.103	500	G1/4" M	1/4" NPTF	0.5 kg
28.104	650	G1/4" M	1/4" NPTF	0.5 kg
28.105	750	G1/4" M	1/4" NPTF	0.6 kg
28.106	850	G1/4" M	1/4" NPTF	0.6 kg
28.107	950	G1/4" M	1/4" NPTF	0.7 kg
28.108	1050	G1/4" M	1/4" NPTF	0.7 kg
28.153	500	G3/8" M	1/4" NPTF	0.5 kg
28.154	650	G3/8" M	1/4" NPTF	0.6 kg
28.155	750	G3/8" M	1/4" NPTF	0.6 kg
28.156	850	G3/8" M	1/4" NPTF	0.6 kg
28.157	950	G3/8" M	1/4" NPTF	0.7 kg
28.158	1050	G3/8" M	1/4" NPTF	0.7 kg

L = total length, Nozzles not included.

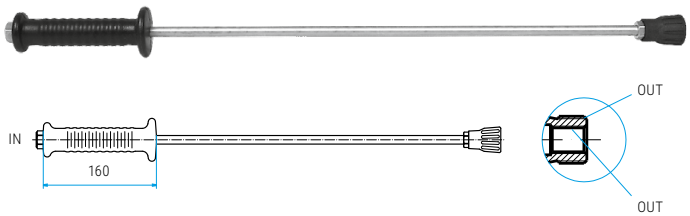

Mosmatic LAH-C (Classic- Lance with filter, Polyurethane - molded soft handle)

Part No.	L	IN	OUT	Weight
28.404	650	G3/8" F	G3/8" M + 1/8" NPTF	0.5 kg
28.414	650	G3/8" F	G3/8" M + 1/4" NPTF	0.5 kg
28.405	750	G3/8" F	G3/8" M + 1/8" NPTF	0.5 kg
28.415	750	G3/8" F	G3/8" M + 1/4" NPTF	0.5 kg

L = total length
100 pieces or more available with red or blue handles. Nozzles not included.

TECHNICAL DATA

Pressure	275 bar (27.5 MPa)
Temperature	120°C
Nominal width	6
Throughput medium	pH 3-12

WWW.MOSMATIC.COM

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **R** = gas pipe thrust conical, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position