
- ✓ **Also model up to 500 bar available**
- ✓ **Low pressure option**
- ✓ **Maintenance free**
- ✓ **Quality stainless steel swivel**
- ✓ **Ready to use**

The surface cleaner for cold and hot water application reaches peak performance without any maintenance. Our most popular flat surface cleaner, ideal for cleaning parking lots, gas stations, school yards, entrance halls etc.



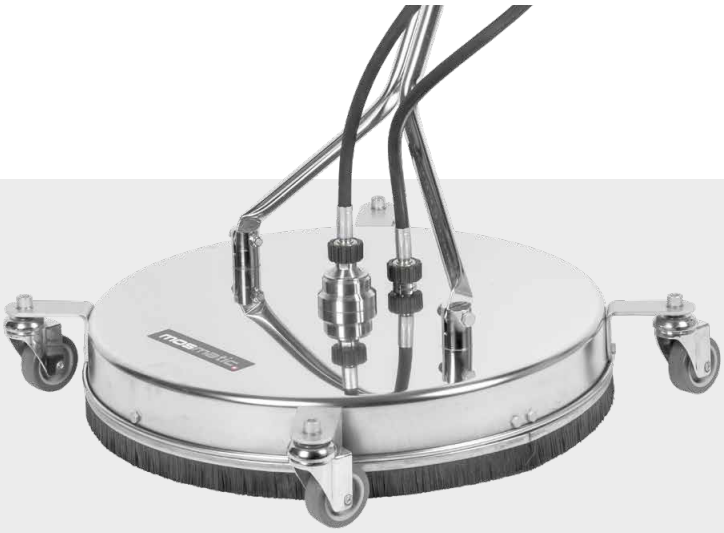

TECHNICAL DATA

Pressure	275 / 500 bar
Temperature	120°C
Inlet	G3/8" F
	G1/4" M



FL-CR 750



FL-CR 520 **FL-CG 520**



Optional protection plate
See accessories for HP Cleaner

FEATURES

Rotor Arms
Can withstand up to 500 bar, are precision welded and balanced.




2cw2 (2 Arms / 2 Nozzles)
Part No. 82.942 (ø470 mm)

3cw3 (3 Arms / 3 Nozzles)
Part No. 82.943 (ø700 mm)

2cp2 (2 Arms / 2 Nozzles)
Part No. 82.946 (ø470 mm), 1/8", 500 bar
Optional: Part No. 82.941 (ø470 mm), 1/4", 500 bar
Optional: Part No. 82.9069 (ø450 mm), 1/8", 500 bar

3cp3 (3 Arms / 3 Nozzles)
Part No. 82.947 (ø700 mm), 1/8", 500 bar

Stainless Steel Caster
Heavy duty ø60 mm casters with custom mounting brackets ensure easy maneuvering even in confined spaces.



Stainless Steel Caster
Part No. 80.912

Quality Swivel
High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYCI Swivel
Part No. 55.253

DYDI Swivel (500 bar)
Part No. 55.263

Low pressure option
This allows for the application of chemicals at low pressure, continuously adjustable through a regulating screw.



Name	Part No.	ø	Weight	Swivel	Rotor Arm	HD-Nozzles	HP-Gun	Stainless Steel Caster
FL-CG 520	**80.750**	520	10.3 kg	1x DYCI	2x 1/8" NPTF	2x 18.15030	1x	--
FL-CR 520	**80.751**	520	12.0 kg	1x DYCI	2x 1/8" NPTF	2x 18.15030	1x	4x ø60
FL-CRz 520**	**80.756**	520	13.5 kg	1x DYCI	2x 1/8" NPTF	2x 18.15030	1x	4x ø60
FL-RY 520*	**80.158**	520	11.5 kg	1x DYDI	2x 1/8" NPTF	--	--	4x ø60
FL-RY 750*	**80.358**	750	13.5 kg	1x DYDI	3x 1/8" NPTF	--	--	4x ø60
FL-CR 750	**80.752**	750	15.5 kg	1x DYCI	3x 1/8" NPTF	3x 18.15030	1x	4x ø60

* Pressure: 500 bar / Inlet G1/4" M, ** with low pressure package

Accessories

Name	Part No.	LP-Valve	LP-Hose	Assembly kit	Weight
Low pressure package	**80.9053**	1x	1x	1x	1.5 kg

WWW.MOSMATIC.COM