
HP-LANCES

- ✓ **High-quality workmanship**
- ✓ **Polyurethane grip**
- ✓ **Delivered ready for installation**

Mosmatic lances made of high quality stainless steel are the standard for your wash bay. The solid construction and the unique workmanship ensure longevity and value. Each lance has a modular design which allows for individual customer requirements. You choose the in-put out-put, length, grip and matching accessories to suit your needs.





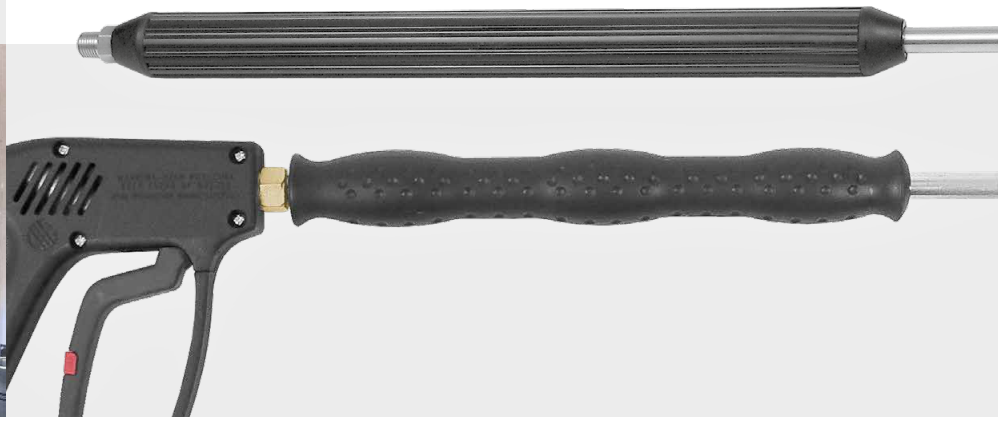




Mosmatic LAN-C (Classic)

Part No.	L	GL	G1	WS	DG	IN	OUT	Weight
24.980	750	400	straight	---	---	R1/4" M	G3/8" M + 1/8" NPTF	0.53 kg
24.981	750	400	bent	---	---	R1/4" M	G3/8" M + 1/8" NPTF	0.53 kg
24.982	1050	400	straight	---	---	R1/4" M	G3/8" M + 1/8" NPTF	0.64 kg
24.983	1050	400	bent	---	---	R1/4" M	G3/8" M + 1/8" NPTF	0.64 kg

25.911	950	800	bent	---	---	R1/4" M	1/2" NPTM	0.68 kg
25.912	950	800	bent	---	---	G1/4" F	1/2" NPTM	0.68 kg
25.913	950	800	bent	---	---	R3/8" M	1/2" NPTM	0.68 kg
25.914	950	800	bent	---	---	G3/8" F	1/2" NPTM	0.68 kg
25.915	950	800	bent	---	---	R1/2" M	1/2" NPTM	0.72 kg
25.916	950	800	bent	---	---	G1/2" F	1/2" NPTM	0.72 kg

L = total length, GL = grip length, Nozzles not included.

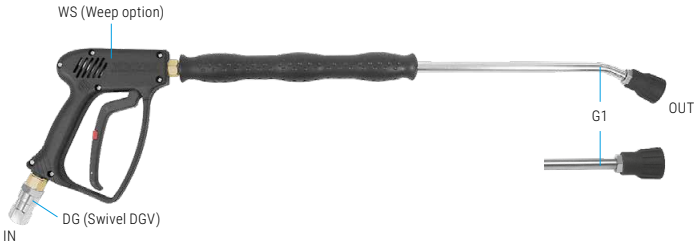

Mosmatic LAN-P (Pro)

Part No.	L	GL	G1	WS	DG	IN	OUT	Weight
28.520	600	300	straight	---	---	G3/8" F	1/4" NPTF	1.03 kg
28.521	600	300	bent	---	---	G3/8" F	1/4" NPTF	1.03 kg
28.522	600	300	straight	yes	---	G3/8" F	1/4" NPTF	1.03 kg
28.523	600	300	bent	yes	---	G3/8" F	1/4" NPTF	1.03 kg
28.524	600	300	straight	yes	yes	G3/8" F	1/4" NPTF	1.16 kg
28.525	600	300	bent	yes	yes	G3/8" F	1/4" NPTF	1.16 kg
28.530	1000	700	straight	---	---	G3/8" F	1/4" NPTF	1.41 kg
28.531	1000	700	bent	---	---	G3/8" F	1/4" NPTF	1.41 kg
28.532	1000	700	straight	yes	---	G3/8" F	1/4" NPTF	1.41 kg
28.533	1000	700	bent	yes	---	G3/8" F	1/4" NPTF	1.41 kg
28.534	1000	700	straight	yes	yes	G3/8" F	1/4" NPTF	1.54 kg
28.535	1000	700	bent	yes	yes	G3/8" F	1/4" NPTF	1.54 kg

L = total length (without HP-Gun), GL = grip length, Nozzles not included.

TECHNICAL DATA

Pressure	275 bar (27.5 MPa)
Temperature	120°C
Nominal width	6
Throughput medium	pH 3-12



Mosmatic LAN-P (Pro)

Art. Nr.	L	GL	G1	WS	DG	IN	OUT	Weight
904.098	330	300	straight	---	---	G1/4" M	G1/4" M	0.3 kg
902.917	600	300	straight	---	---	G1/4" M	G1/4" M	0.4 kg
902.964	600	300	bent	---	---	G1/4" M	G1/4" M	0.4 kg
903.655	700	300	straight	---	---	G1/4" M	G1/4" M	0.4 kg
902.982	700	300	bent	---	---	G1/4" M	G1/4" M	0.4 kg
903.118	900	700	straight	---	---	G1/4" M	G1/4" M	0.8 kg
904.848	900	700	bent	---	---	G1/4" M	G1/4" M	0.8 kg
902.918	1000	300	straight	---	---	G1/4" M	G1/4" M	0.6 kg
902.981	1000	300	bent	---	---	G1/4" M	G1/4" M	0.6 kg
905.808	1200	400	straight	---	---	G1/4" M	G1/4" M	0.8 kg
905.803	1200	400	bent	---	---	G1/4" M	G1/4" M	0.8 kg

L = total length, GL = grip length, Nozzles not included.

TECHNICAL DATA

Pressure	400 bar (40.0 MPa)
Temperature	120°C
Nominal width	8
Throughput medium	pH 3-12

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **R** = gas pipe thrust conical, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position

WWW.MOSMATIC.COM