
DUCT CLEANER

- ✓ **Easy installation**
- ✓ **Self rotating and stainless steel**
- ✓ **Adjustable and non adjustable versions**
- ✓ **Protection plate available**
- ✓ **Maintenance free**

Clean vent hoods, trash chutes, pipes, totes, manholes and most containers. This self rotating unit is completely maintenance free. The rotating head spins within the protective cage directing the high pressure spray to your surface. The installation is simple and fast.





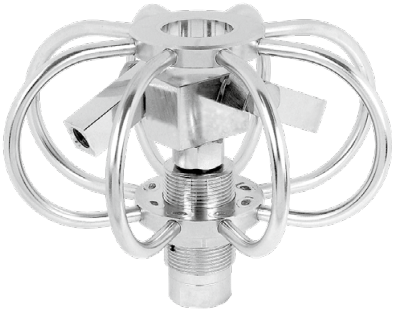

(81.522)

* Nozzles not included.

Important:
Do not use unprotected!

TYR *adjustable*

The adjustable arms allow different spray angles. Perfect for horizontal ducts and tanks.

warm water		cold water					
TYR-2s	**TYR-3s**	**TRR-2s**	**TRR-3s**				
Part No.	**Part No.**	**Part No.**	**Part No.**	ø	IN	Height	Weight
81.501	**81.701**	**85.501**	**85.701**	75	G1/4" F	60	0.5 kg
81.502	**81.702**	**85.502**	**85.702**	75	G3/8" F	60	0.5 kg
81.521	**81.721**	**85.521**	**85.721**	150	G1/4" F	70	0.8 kg
81.522	**81.722**	**85.522**	**85.722**	150	G3/8" F	70	0.8 kg
81.551	**81.751**	**85.551**	**85.751**	300	G1/4" F	70	1.1 kg
81.552	**81.752**	**85.552**	**85.752**	300	G3/8" F	70	1.1 kg
81.561	**81.761**	**85.561**	**85.761**	400	G1/4" F	70	1.3 kg
81.562	**81.762**	**85.562**	**85.762**	400	G3/8" F	70	1.3 kg
81.571	**81.771**	**85.571**	**85.771**	500	G1/4" F	70	1.6 kg
81.572	**81.772**	**85.572**	**85.772**	500	G3/8" F	70	1.6 kg
81.581	**81.781**	**85.581**	**85.781**	600	G1/4" F	70	1.8 kg
81.582	**81.782**	**85.582**	**85.782**	600	G3/8" F	70	1.8 kg



(81.422)

* Nozzles not included.

Important:
Do not use unprotected!

TYR *fixed*

The non adjustable arms with fixed spray angle is perfect for vertical chutes.

warm water		cold water					
TYR-2f	**TYR-3f**	**TRR-2f**	**TRR-3f**				
Part No.	**Part No.**	**Part No.**	**Part No.**	ø	IN	Height	Weight
81.401	**81.601**	**85.401**	**85.601**	75	G1/4" F	60	0.5 kg
81.402	**81.602**	**85.402**	**85.602**	75	G3/8" F	60	0.5 kg
81.421	**81.621**	**85.421**	**85.621**	150	G1/4" F	70	1.0 kg
81.422	**81.622**	**85.422**	**85.622**	150	G3/8" F	70	1.0 kg
81.451	**81.651**	**85.451**	**85.651**	300	G1/4" F	70	1.3 kg
81.452	**81.652**	**85.452**	**85.652**	300	G3/8" F	70	1.3 kg
81.461	**81.661**	**85.461**	**85.661**	400	G1/4" F	70	1.5 kg
81.462	**81.662**	**85.462**	**85.662**	400	G3/8" F	70	1.5 kg
81.471	**81.671**	**85.471**	**85.671**	500	G1/4" F	70	1.6 kg
81.472	**81.672**	**85.472**	**85.672**	500	G3/8" F	70	1.6 kg
81.481	**81.681**	**85.481**	**85.681**	600	G1/4" F	70	1.8 kg
81.482	**81.682**	**85.482**	**85.682**	600	G3/8" F	70	1.8 kg

TECHNICAL DATA

Pressure	275 bar	**Nozzles**	**2f/2s** for 2x 1/8" Nozzles*
Temperature	**TYR** 120°C / **TRR** 30°C		**3f/3s** for 3x 1/8" Nozzles*
Inlet	see chart	**Throughput**	ph 3 - 12
Body	stainless steel		
RPM	**TYR** 2000 rpm / **TRR** 1000 rpm		

WWW.MOSMATIC.COM