DOCUMENTATION TECHNIQUE

Têtes de lavage et équipements de nettoyage

Caractéristiques, plans et instructions du fabricant.
Pour le choix de votre équipement et la préparation d'une demande de devis.

GEDO FRANCE

04 85 88 02 75

tete@gedo.fr

tetelavage.gedo.fr

565 avenue du Prado - 13008 Marseille - France



Spraying Systems Co.®
Experts in Spray Technology

TANKJET® TANK CLEANING PRODUCTS


QUICK REFERENCE GUIDE



TANKJET® TANK CLEANING PRODUCTS

Nozzle	Max. Tank Dia. ft. (m)	Operating Principle	Flow Rate gpm (lpm)	Operating Pressure psi (bar)	Spray Coverage	Min. Tank Opening in. (mm)	Max. Temp. °F (°C)	Recommended Strainer Mesh (micron)
Cloud-Sellers® 360 	**100 (30.5)**	Fluid-driven turbine	30 to 300 (114 to 1136)	40 to 350 (2.8 to 24.1)	360°	6.25 (159) for 2 nozzle; 10.25 (260) for 3 nozzle	250 (121)	20 (840)
TankJet AA290 		Motor-driven	24 to 284 (91 to 1075)	50 to 250 (3.4 to 17.2)	360°	7.25 (184) for 2 nozzle; 8.25 (210) for 4 nozzle	200 (93)	100 (150)
Cloud-Sellers 180 	**80 (24.4)**	Fluid-driven turbine	30 to 300 (114 to 1136)	40 to 350 (2.8 to 24)	180°	12.25 (311)	250 (121)	20 (840)
TankJet 80H 	**50 (15.2)**	Fluid-driven turbine	53 to 142 (200 to 538)	60 to 200 (4.1 to 13.8)	360°	6.5 (165) for 2 nozzle; 12.5 (318) for 3 nozzle	250 (121)	20 (840)
TankJet 78 & 78D 	**45 (13.7)**	Fluid-driven turbine	65 to 165 (246 to 625)	25 to 100 (1.7 to 6.9)	360°	TJ78: 5.75 (146) TJ78D: 7.63 (194)	200 (93)	50 (300)
TankJet 67 	**40 (12.2)**	Fluid-driven turbine	57 to 137 (216 to 519)	50 to 150 (3.4 to 10.3)	360°	8.75 (220)	500 (260)	20 (840)
TankJet AA190 		Motor-driven	3.1 to 44 (11.8 to 167)	100 to 1000 (6.9 to 69)	180°, 360°	3.75 (95) for 360°; 4.5 (114.3) for 180°	200 (93)	100 (150)
TankJet YMD3 	**30 (9.1)**	Motor-driven	8.6 to 37.5 (32.6 to 142)	725 to 4350 (50 to 300)	360°	3.75 (95)	176 (80)	100 (150)
TankJet 75H 		Fluid-driven turbine	15.0 to 33 (57 to 125)	75 to 300 (5.2 to 21)	360°	3.75 (95)	250 (121)	200 (80)
TankJet 78M 	**25 (7.6)**	Fluid-driven turbine	13.0 to 37 (49 to 140)	25 to 120 (1.7 to 8.3)	360°	2.81 (71.5)	200 (93)	50 (300)
TankJet 27500 & 27500-R 	**10 to 25 (3.0 to 7.6)**	Fluid-driven reactionary force	4.0 to 224 (15.3 to 850)	10.0 to 50 (0.7 to 3.4)	180° up/down, 270° up/down, 360°	2 to 7 (51 to 178)	200 (93)	100 (150)
TankJet 16 	**24 (7.2)**	Fluid-driven turbine	36 to 76 (136 to 288)	50 to 200 (3.4 to 13.8)	180° up/down, 270° down, 360°	3 (76)	250 (121)	20 (840)
TankJet 28500 & 28500-R 	**18 (5.5)**	Fluid-driven reactionary force	9.0 to 78.3 (34 to 296)	10.0 to 50 (0.7 to 3.4)	180° up/down, 270° up/down, 360°	2.5 to 4 (64 to 102)	200 (93)	100 (150)
TankJet 12900 	**18 (5.5)**	Fixed stationary	72 to 385 (280 to 1470)	20 to 50 (1.4 to 3.4)	360° and custom spray angles	10 (254)	212 (100)	16 to 100 (1190 to 150)
TankJet AA090 	**16 (4.9)**	Motor-driven	1.1 to 6.9 (4.0 to 26)	40 to 500 (2.8 to 34.5)	360°	1.87 (47.5)	200 (93)	100 (150)

Nozzle	Max. Tank Dia. ft. (m)	Operating Principle	Flow Rate gpm (lpm)	Operating Pressure psi (bar)	Spray Coverage	Min. Tank Opening in. (mm)	Max. Temp. °F (°C)	Recommended Strainer Mesh (micron)
TankJet D26984 & D40159 	**10 to 16 (3.0 to 4.9)**	Fluid-driven constant speed	3.2 to 19.8 (12.0 to 75)	30 to 90 (2.1 to 6.2)	65° down, 120° down, 180° up/down, 260° up/down, 360°	Thread: 2.25 (56) CIP version: 4 (102)	160 (70)	200 (74)
TankJet D41800E 	**10 to 16 (3.0 to 4.9)**	Fluid-driven constant speed	3.0 to 22.8 (11.0 to 86)	30 to 90 (2.1 to 6.2)	360°	1.25 (32)	265 (130)	200 (74)
TankJet D41990 	**6.5 to 16 (2.0 to 4.9)**	Fluid-driven reactionary force	2.4 to 37.4 (9.0 to 141)	15.0 to 60 (1.0 to 4.1)	180° up/down, 360°	Thread: 1 to 1.5 (25 to 38) CIP version: 2 to 4 (51 to 102)	265 (130)	200 (74)
TankJet 9 A, B & C 	**6 to 16 (1.8 to 4.9)**	Fluid-driven reactionary force	1.3 to 38 (4.9 to 144)	10.0 to 120 (0.7 to 8.3)	2 x 175°, 360°	TJ9-A: 1.25 (32) TJ9-B: 1.5 (38) TJ9-C: 1.75 (44)	190 (88)	20 (840)
Cloud-Sellers® Tankmaster T5 	**15 (4.6)**	Fluid-driven turbine	12 to 40 (45 to 151)	100 to 600 (3.4 to 41.4)	360°	Short nozzle: 2.9 (74) Long nozzle: 4.4 (112)	190 (88)	20 (840)
TankJet 63225 	**13 (4.0)**	Fixed stationary	22 to 51 (83 to 192)	15.0 to 40 (1.0 to 2.8)	360°	1.5 to 4 (38 to 102)	400 (204)	16 to 50 (1190 to 300)
TankJet 14 & 19 	**12 (3.7)**	Fluid-driven turbine	10.0 to 30 (38 to 114)	50 to 200 (3.4 to 13.8)	180° up/down, 270° down, 360°	2 (51)	250 (121)	20 (840)
TankJet 50 	**10 (3.0)**	Fluid-driven turbine	1.9 to 10.3 (7.4 to 39)	75 to 1000 (5.2 to 69)	360°	1.75 (44)	200 (93°)	100 (150)
TankJet 6353 & 6353-MFP 		Fixed stationary	8.9 to 80 (35 to 301)	20 to 50 (1.4 to 3.4)	360°	6 (152)	212 (100)	16 to 100 (1190 to 150)
TankJet 18250A 	**8 (2.4)**	Fluid-driven reactionary force	10.5 to 55 (48 to 205)	10.0 to 60 (0.7 to 4.1)	360°	2.38 (60)	350 (177)	200 (74)
TankJet D41892 	**6.5 (2.0)**	Fluid-driven reactionary force	4.0 to 7.5 (15.9 to 29)	20 to 70 (1.4 to 4.8)	360°	1.5 (37)	160 (70)	200 (74)
TankJet D26564 	**5 (1.5)**	Fluid-driven reactionary force	2.4 to 5.4 (9.0 to 20.5)	14.5 to 72.5 (1.0 to 5.0)	180° up/down	1.5 (37)	194 (90)	200 (74)
TankJet 21400A 		Fluid-driven reactionary force	5.0 to 22 (23 to 82)	10.0 to 60 (0.7 to 4.1)	360°	2.25 (60)	350 (177)	200 (74)
TankJet VSM 		Fixed stationary	2.7 to 72 (10.4 to 269)	10.0 to 150 (0.7 to 10.3)	240° down	2 (51)	200 (93)	50 (297)
TankJet 30473 	**3 (0.9)**	Fluid-driven reactionary force	2.1 to 4.5 (7.8 to 18.0)	10.0 to 50 (0.7 to 3.4)	180° up/down, 360°	1 (25)	200 (93)	200 (74)
TankJet 23240-2 23240-3 		Fluid-driven reactionary force	3.5 to 22 (14.0 to 79)	20 to 200 (1.4 to 13.8)	360°, side spray	1.03 (26)	350 (177)	200 (74)

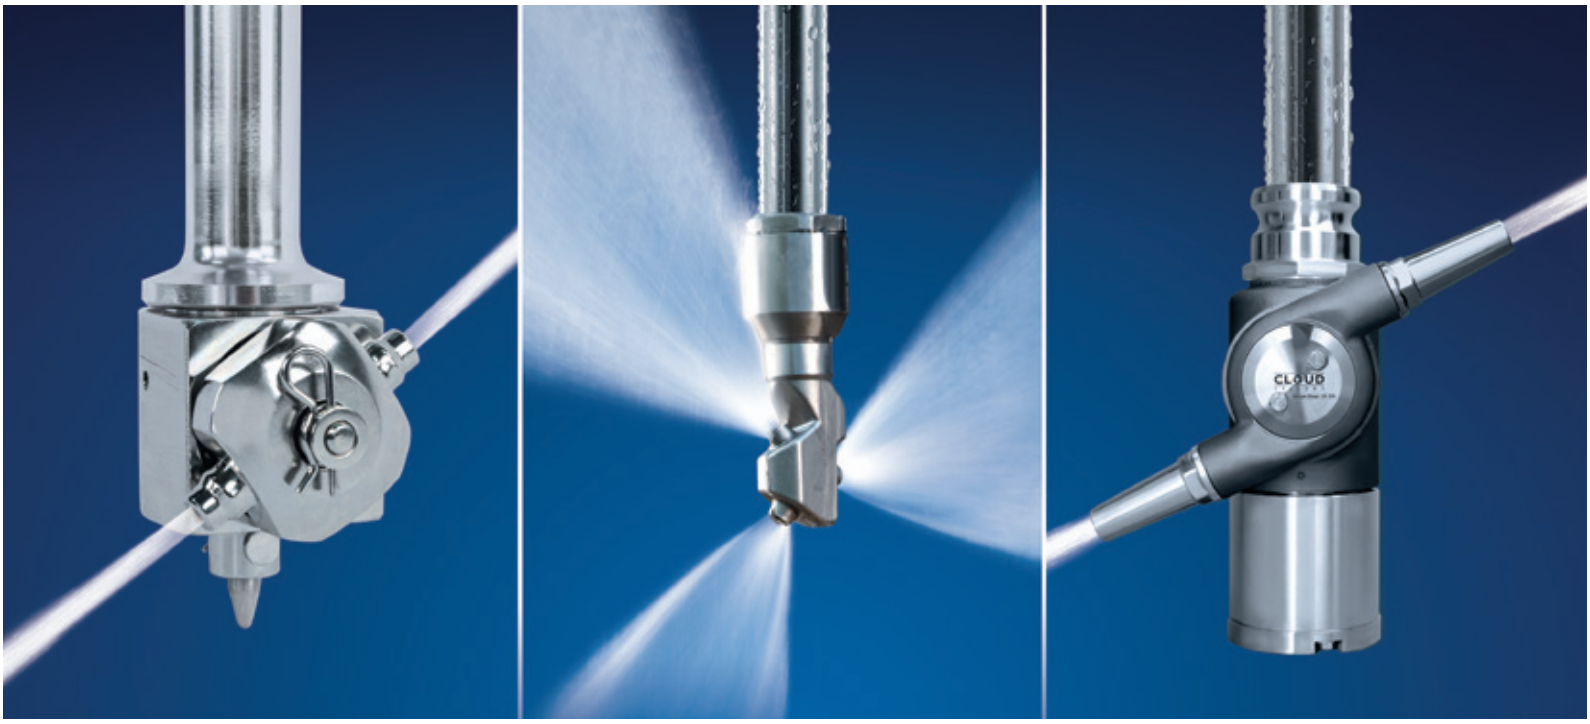

CLEAN YOUR TANKS FASTER, REDUCE WATER AND CHEMICAL USE WITH TANKJET®

TELL US ABOUT:

- The size of your tank
- The residue that needs to be cleaned
- The cleaning liquid used

And we'll tell you which of our many automated tank cleaning products is right for the job. With a newly expanded product line, we have solutions for:

- Gentle rinsing to high-impact cleaning to remove stubborn residues
- Containers and tanks with diameters as small as 3 ft. (0.9 m) and up to 100 ft. (30.5 m)
- Portable or clean-in-place operation

One of our locals sales engineers is standing by and ready to help. Call 1.800.95.SPRAY to learn about our complimentary on-site evaluations, free trial programs and more.

1.800.95.SPRAY
visit tankjet.com



Spraying Systems Co.®
Experts in Spray Technology

North Avenue and Schmale Road, P.O. Box 7900, Wheaton, IL 60187-7901 USA
Tel: 1.800.95.SPRAY Intl. Tel: 1.630.665.5000
www.spray.com

Bulletin No. 688I Printed in the U.S.A. ©Spraying Systems Co. 2025

CERTIFIED
ISO 9001
ISO 14001