TANKJET 6353 & 6353-MFP TANK CLEANING NOZZLE FEATURES AND BENEFITS

- TankJet 6353-MFP provides increased cleaning action by using 3/8" Maximum Free Passage (MFP) FullJet® nozzles; MFP design helps reduce clogging
- Simple and reliable with no moving parts
- Individual nozzles can be replaced with plugs to provide specific cleaning coverages
- Nozzles are easily removed for cleaning and inspection
- Can be installed in any position
- Special designs available for a wide range of coverages
- Special materials available on request



TankJet 6353
tank cleaning nozzle



TankJet 6353-MFP
tank cleaning nozzle

R
RINSING

SPRAY COVERAGE

360°



MOUNTING OPTIONS

Vertical	↑ ↓
Horizontal	← →
45° Up	↖ ↗
45° Down	↙ ↘


SPECIFICATIONS

TankJet 6353 Tank Cleaning Nozzles	Standard version	MFP version
Max. tank diameter:	10 ft. (3 m)	10 ft. (3 m)
Operating principle:	Stationary	Stationary
Flow rate:	8.9 to 60 gpm (35 to 230 lpm)	25 to 80 gpm (93 to 301 lpm)
Operating pressure:	20 to 50 psi (1.4 to 3.4 bar)	20 to 50 psi (1.4 to 3.4 bar)
Max. temperature:	212°F (100°C)	212°F (100°C)
Materials:	Brass, 303, or 316 stainless steel	Brass, 303 or 316 stainless steel
Inlet connection:	1-1/2" NPT or BSPT (F)	1-1/2" NPT or BSPT (F)
Optional accessories:	Strainers, recommended mesh size: 16 to 100 (1190 to 150 micron). See page G2	

IDEAL FOR CLEANING:

- Chemical processing tanks
- Process tanks
- Pulp chests

DIMENSIONS AND WEIGHTS




Nozzle	L in. (mm)	W in. (mm)	Min. Tank Opening in. (mm)	Weight lbs. (kg)
6353-1/4GG-5	4-1/2 (114)	4-1/2 (114)	6 (152)	3.7 (1.6)
6353-1/4GG-10				
6353-3/8GG-22	4-1/2 (114)	5 (127)	6 (152)	4.5 (2.0)
6353-3/8HHMFP-6014	4-1/2 (114)	4-1/2 (114)	6 (152)	3.7 (1.6)
6353-3/8HHMFP-6022				
6353-3/8HHMFP-6032				

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France

PERFORMANCE DATA

TankJet 6353 & 6353-MFP Cleaning Effectiveness

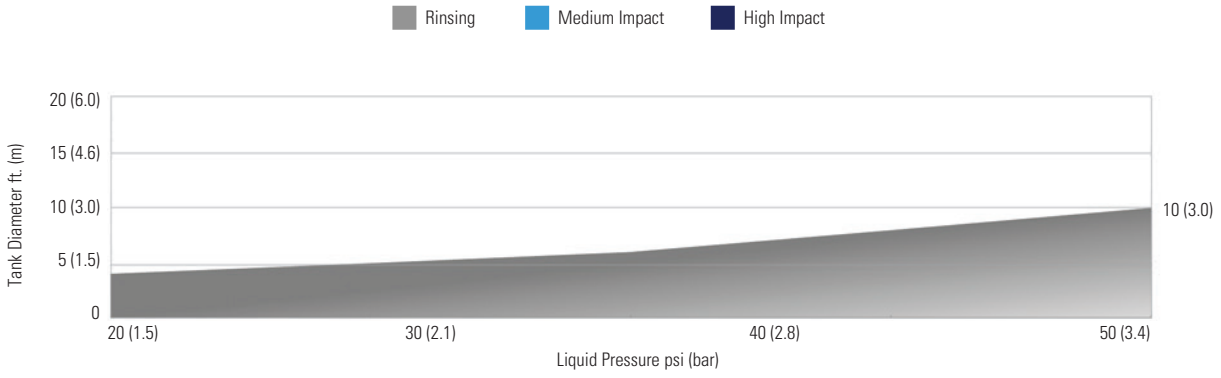

Model	FullJet® Nozzle	Capacity Size	Max. Free Passage in. (mm)	Liquid Flow Capacity gpm (lpm)			
				20 psi (1.5 bar)	30 psi (2.1 bar)	40 psi (2.8 bar)	50 psi (3.4 bar)
6353	1/4GG	5	0.050 (1.3)	8.9 (35)	10.8 (40)	12.3 (48)	13.6 (52)
	1/4GG	10	0.063 (1.6)	17.9 (70)	22 (80)	25 (97)	27 (104)
	3/8GG	22	0.109 (2.8)	39 (155)	48 (177)	55 (215)	60 (230)
	3/8HHMFP	6014	0.125 (3.2)	25 (93)	29 (108)	31 (118)	33 (123)
	3/8HHMFP	6022	0.156 (4.0)	38 (143)	44 (167)	49 (187)	54 (204)
	3/8HHMFP	6032	0.188 (4.8)	55 (206)	65 (246)	73 (276)	80 (301)

ORDERING INFORMATION

6353 TANK CLEANING NOZZLE

Model* – Nozzle – Material Code** Capacity Size

EXAMPLE: 6353 – 1/4GG – 316SS 5

6353-MFP TANK CLEANING NOZZLE

Model* – Nozzle – Material Code** Capacity Size

EXAMPLE: 6353 – 3/8HHMFP – 316SS 6014

*Add B prior to the model number for BSPT connections.
**Leave blank when ordering brass. Specify SS for 303 stainless steel, and 316SS for Stainless Steel Type 316 (DIN 1.4571).

For lances, mounting kits, adapters and more, see page G6

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France