HydroWhirl® Mini



(HWM) PVDF Reactionary Force




DESIGN FEATURES

- Fluid-driven, self-flushing
- Compact design, maintenance-free
- Made from FDA-compliant, PVDF material
- Corrosion-resistant
- Hydrostatic wear free slide bearing

SPRAY CHARACTERISTICS

- Vigorous spray action

Spray Angles: Complete 360° spray coverage.
Flow Rates: 10.9 to 33.5 l/min
Max Temperature: 194°F/90°C
Filtration: Line strainer with a mesh size of 0.3 mm/50 mesh

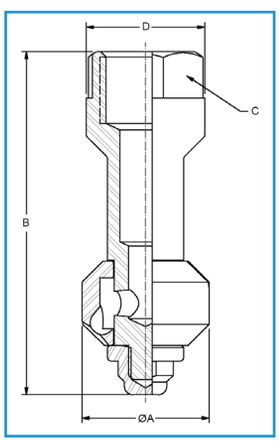

DIMENSIONS IN MILLIMETERS

Pipe Size	A	B	C	D	Weight (grams)
1/2”	30.5	81.3	22.9	27.9	31.1

HYDROWHIRL® MINI FLOW RATES

Materials: PVDF

Female Connection Type	Nozzle Number	Spray Angles	Flow Rate (L/min) @ Differential Pressure (bar)						Maximum Free Passage	Coverage Dia @ 3 bar
			0.5	0.7	1	2	3	4		
			bar	bar	bar	bar	bar	bar	mm	m
1/2" FNPT	**HWM-7.2**	360°	10.9	13.0	15.8	23.0	28.7	33.5	1.91	1

TANK CLEANING

GEDO

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France