HydroWhirl® Disc

(HWD) Powerful Submersible Rotating Tank Cleaner



DESIGN FEATURES

- Fluid-driven, self-flushing
- Fully submersible, clog-resistant
- Powerful flat spray nozzle inserts
- Hydrostatic wear-free PTFE slide bearing for longer life
- Made from FDA-compliant, 316L SS
- For cleaning medium-sized tanks


SPRAY CHARACTERISTICS

- Vigorous spray action

Spray Angles: Complete 360° spray coverage

Flow Rates: 96.3 to 227 l/min

Max Temperature: 194°F/90°C

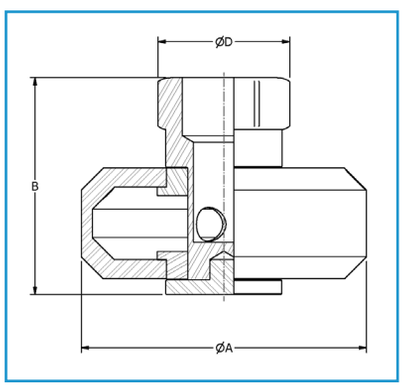

DIMENSIONS IN MILLIMETERS

Pipe Size	A	B	D	Weight (grams)
1”	98.4	74.8	40.6	1162

TANK CLEANING

HYDROWHIRL® DISC FLOW RATES

Materials: Stainless Steel Body: PFTE Slide-Bearing

Female Connection Type	Nozzle Number	Spray Angles	Flow Rate (LPM) @ Differential Pressure (bar)					Maximum Free Passage	Coverage Dia @ 2 bar
			0.7	1	2	3	4		
			bar	bar	bar	bar	bar	mm	m
1” FNPT	HWD-50	360°	96.3	115	162	198	227	3.30	3

GEDO

Distribution et conseil : GEDO FRANCE

04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr

565 avenue du Prado - 13008 Marseille - France