
Rotating cleaning nozzle MiniWhirly
Series 500.186

Features:

- Economical entry-level model
- Cleaning with effective flat jets
- Specifically designed for barrel and canister cleaning



Series 500,186

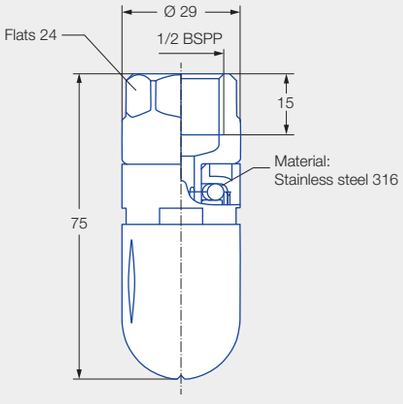

Female thread

Max. tank diameter [m]

0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9

Cleaning efficiency class
2

Max. temperature
50 °C

Installation
Vertically facing downwards

Bearing
Ball bearing made of stainless steel 316

Material
POM, stainless steel 316

Recommended operating pressure
2 bar

Filtration
Line strainer with a mesh size of 0.3 mm/50 mesh

Function video
www.lechler.com/de-en/medialibrary/videos-general-industry
Or scan the QR code.

Spray angle	Ordering no. Type	Narrowest free cross section Ø [mm]	V̇ water [l/min] p [bar] (p_{max} = 5 bar) 1.0	**2.0**	3.0	at 40 psi [US gal/min]	Max. tank diameter [m]
300°	**500.186.56.AH**	1.9	13	**18**	22	6	1.3

The maximum tank diameter applies to the recommended operating pressure and is meant as a recommendation only.
The cleaning result is also affected by the type of soiling.

Compressed air should be used for dry blowing for a short time only. Operation above the recommended operating pressure has a negative impact on the cleaning result and wear.

CONTACT: Lechler GmbH · Ulmer Strasse 128 · 72555 Metzingen, Germany · Phone +49 7123 962-0 · ind@lechler.de · www.lechler.com

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France