Rotating cleaning nozzle Whirly 2
Series 5W9

Features:


- Popular hygienic design
- Cleaning with effective flat jets
- Various connection options
- Available with a wide range of flow rates and spray angles

ATEX version on request




FDA


Series 5W9

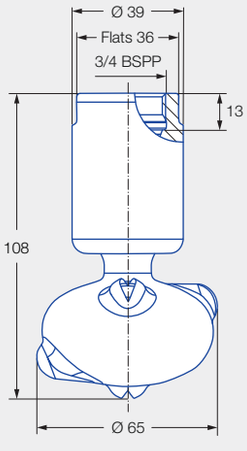


Female thread

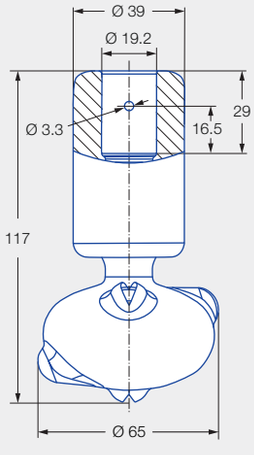

Dimensions slip-on connection according to ASME-BPE (OD-tube)

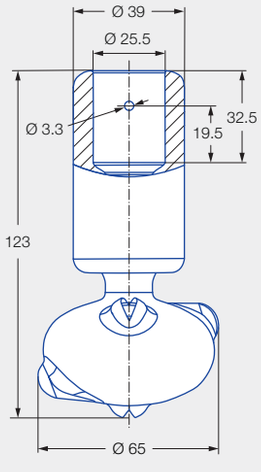

Dimensions slip-on connection according to ASME-BPE (OD-tube)



Insertion diameter of slip-on connection Stainless steel 316L

Max. tank diameter [m]

0	1	2	3	4	5	6	7	8	9

Cleaning efficiency class
3

Max. temperature
150 °C

Installation
Operation in every direction is possible

Bearing
Double ball bearing made of stainless steel

Material
Stainless steel 316L, PEEK

Recommended operating pressure
2 bar

Filtration
Line strainer with a mesh size of 0.1 mm/170 mesh

Adapter
3/4 BSPP is compatible with HygienicFit

Function video
www.lechler.com/de-en/medialibrary/videos-general-industry
Or scan the QR code.

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France

Spray angle	Ordering no.				Narrowest free cross section Ø [mm]	V̇ water [l/min]				Max. tank diameter [m]
	Type	Code				p [bar] (p_{max} = 6 bar)				
		3/4 BSPP	3/4" Slip-on connection	1" Slip-on connection		1.0	**2.0**	3.0	at 40 psi [US gal/min]	
270° 	**5W9.075.1Y**	**AL**	**TF07**	**TF10**	2.0	34	**48**	59	15	1.8
	5W9.145.1Y	**AL**	**TF07**	**TF10**	2.8	50	**71**	87	22	2.1
	5W9.195.1Y	**AL**	**TF07**	**TF10**	3.3	69	**97**	119	30	2.6
270° 	**5W9.076.1Y**	**AL**	**TF07**	**TF10**	2.0	34	**48**	59	15	1.8
	5W9.106.1Y	**AL**	**TF07**	**TF10**	2.5	41	**58**	71	18	2.1
	5W9.196.1Y	**AL**	**TF07**	**TF10**	3.4	69	**97**	119	30	2.6
360° 	**5W9.079.1Y**	**AL**	**TF07**	**TF10**	1.6	34	**48**	59	15	1.8
	5W9.149.1Y	**AL**	**TF07**	**TF10**	2.4	50	**71**	87	22	2.1
	5W9.199.1Y	**AL**	**TF07**	**TF10**	3.0	69	**97**	119	30	2.6
	5W9.279.1Y	**AL**	**TF07**	**TF10**	3.5	103	**145**	178	45	3.0

NPT thread available on request.

The maximum tank diameter applies to the recommended operating pressure and is meant as a recommendation only.
The cleaning result is also affected by the type of soiling.

Compressed air should be used for dry blowing for a short time only. Operation above the recommended operating pressure has a negative impact on the cleaning result and wear.

Information about slip-on connections

- Pin made of stainless steel 316L supplied (Ordering no.: 095.013.1Y.06.72).
- Depending on the diameter of the adapter, the flow rate can increase due to a leakage between the adapter and the rotating cleaning nozzle.
- Minimum insertion diameter (with mounted pin) is 69.5 mm.

Ordering example:	Type	+	Code	=	Ordering no.
	5W9.075.1Y	+	**AL**	=	**5W9.075.1Y.AL**

CONTACT: Lechler GmbH · Ulmer Strasse 128 · 72555 Metzingen, Germany · Phone +49 7123 962-0 · ind@lechler.de · www.lechler.com

Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France