TANKJET® D41892 TANK CLEANING NOZZLE

TANKJET D41892 TANK CLEANING NOZZLE FEATURES AND BENEFITS

- Three flat sprays provide 360° coverage to rinse the entire tank
- The flow of the cleaning liquid drives spray head rotation
- Lightweight, durable and corrosion resistant
- CIP connection and ATEX-certified versions available upon request

R
RINSING

SPRAY COVERAGE

360°



MOUNTING OPTIONS

Vertical	↑ ↓
Horizontal	← →
45° Up	↖ ↗
45° Down	↙ ↘



TankJet D41892
tank cleaning nozzle


SPECIFICATIONS

Nozzle	TankJet D41892
Max. tank diameter:	6.5 ft (2.0 m)
Operating principle:	Fluid-driven reactionary force
Flow rate:	4.0 to 7.5 gpm (15.9 to 29 lpm)
Operating pressure:	20 to 70 psi (1.4 to 4.8 bar)
Max. temperature:	160°F (70°C)
Materials:	Polyacetal (POM)
Inlet connection:	3/8", 1/2" NPT or BSPT (F)
Optional accessories:	Strainers, recommended mesh size: 200 (74 micron) See page G2

IDEAL FOR CLEANING:

- Chemical containers
- Mixing tanks
- Food containers

DIMENSIONS AND WEIGHTS

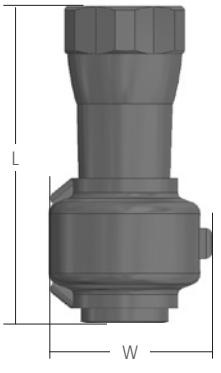


Model	L in. (mm)	W in. (mm)	Min. Tank Opening in. (mm)	Weight lbs. (kg)
D41892	2.7 (68)	1.46 (37)	1-1/2 (37)	1.4 (0.04)

GEDO
Distribution et conseil : GEDO FRANCE
04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr
565 avenue du Prado - 13008 Marseille - France

PERFORMANCE DATA

TankJet D41892 Cleaning Effectiveness

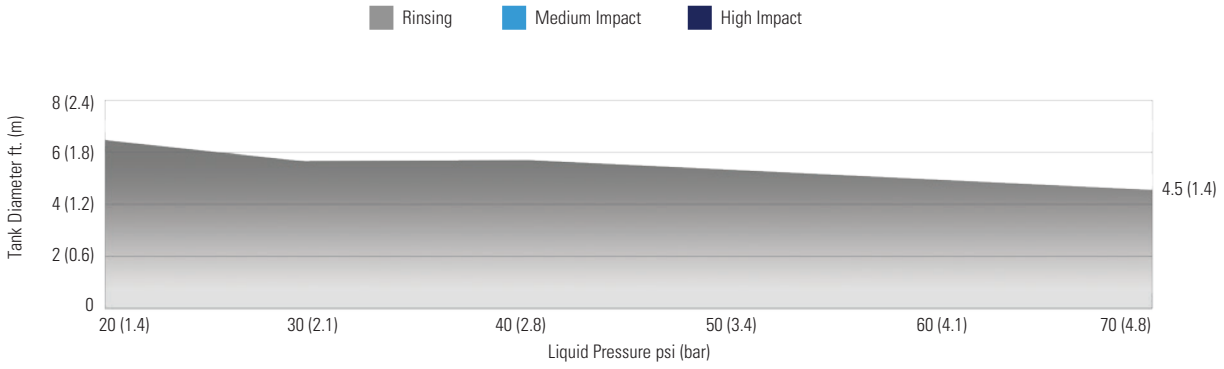

Inlet Conn. Size in.	Capacity Size	Liquid Flow Capacity gpm (lpm)					
		20 psi (1.4 bar)	30 psi (2.1 bar)	40 psi (2.8 bar)	50 psi (3.4 bar)	60 psi (4.1 bar)	70 psi (4.8 bar)
3/8	6	4.0 (15.9)	4.9 (18.3)	5.7 (20.5)	6.4 (22.5)	7.0 (26)	7.5 (29)
1/2							

ORDERING INFORMATION

TANKJET D41892 TANK CLEANING NOZZLE

Model – Inlet Conn. Size* – Material Code – Capacity Size

EXAMPLE

D41892 – 1/2 – POM – 6

*Add B prior to inlet connection for BSPT connections.

For lances, mounting kits, adapters and more, see page G6

GEDO

Distribution et conseil : GEDO FRANCE

04 85 88 02 75 | tete@gedo.fr | tetelavage.gedo.fr

565 avenue du Prado - 13008 Marseille - France